


# RT125 QUAD TRACTOR ATTACHMENTS



**VP120Q (QUAD VIBRATORY PLOW)**

| DIMENSIONS                                   | U.S.     | METRIC  |
|--|----------|---------|
| Angle of departure, transport, no blade      | 47.5°    |         |
| Angle of departure, transport, 24-inch blade | 30°      |         |
| Angle of departure, transport, 30-inch blade | 24°      |         |
| Attachment length, fully lowered, no blade   | 97 in    | 2464 mm |
| Attachment length, fully raised, no blade    | 78 in    | 1981 mm |
| Cover depth*                                 | 42 in    | 1067 mm |
| Attachment weight, without plow blade        | 2,600 lb | 1180 kg |

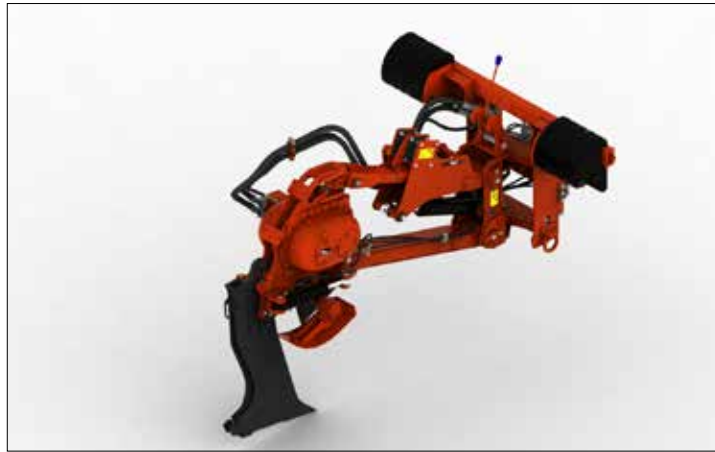

**PT120Q (QUAD TRENCHER PLOW)**

| DIMENSIONS   | U.S.     | METRIC  |
|--|----------|---------|
| Angle of departure, transport, no blade              | 47.5°    |         |
| Angle of departure, transport, 24-inch blade         | 30°      |         |
| Angle of departure, transport, 30-inch blade         | 24°      |         |
| Attachment length, fully lowered, no blade           | 97 in    | 2464 mm |
| Attachment length, fully raised, no blade            | 78 in    | 1981 mm |
| Cover depth*   | 42 in    | 1067 mm |
| Attachment weight without boom, chain, or plow blade | 3,455 lb | 1567 kg |



**CT120H (HYD. CENTERLINE TRENCHER)**

| DIMENSIONS            | U.S.     | METRIC  |
|-----------------------|----------|---------|
| Angle of departure    | 30°      |         |
| Trench depth, maximum | 93 in    | 2362 mm |
| Trench width, maximum | 24 in    | 610 mm  |
| Transport height      | 128 in   | 3251 mm |
| Transport length      | 120 in   | 3048 mm |
| Attachment weight     | 1,750 lb | 794 kg  |



**ST120H (HYD. SLIDING TRENCHER)**

| DIMENSIONS            | U.S.     | METRIC  |
|-----------------------|----------|---------|
| Angle of departure    | 27°      |         |
| Trench depth, maximum | 90 in    | 2286 mm |
| Trench width, maximum | 24 in    | 610 mm  |
| Transport length      | 134.5 in | 3416 mm |
| Attachment weight     | 2,350 lb | 1066 kg |

# RT125 QUAD TRACTOR ATTACHMENTS



**BH120 (BACKHOE)**

| DIMENSIONS                    | U.S.     | METRIC     |
|-------------------------------|----------|------------|
| Transport height              | 122 in   | 3099 mm    |
| Ground clearance              | 33 in    | 838 mm     |
| Digging depth, max.           | 108 in   | 2743 mm    |
| Reach from swing pivot        | 158 in   | 4013 mm    |
| Bucket width                  | 12-24 in | 300-610 mm |
| Backhoe weight without bucket | 3,300 lb | 1497 kg    |
| Swing arc                     | 180°     |            |



**RC30 (REEL CARRIER)**

| DIMENSIONS         | U.S.     | METRIC  |
|--------------------|----------|---------|
| Reel diameter, max | 96 in    | 2438 mm |
| Internal width     | 54 in    | 1372 mm |
| Capacity           | 3,000 lb | 1360 kg |



\*Suggested maximum. Plow blade used will be determined by job requirements and soil conditions.