

RT105M TRACTOR SPECIFICATIONS

	U.S.	METRIC
DIMENSIONS		
Angle of approach (A2)	25°	
Height (H1)	115 in	2,920 mm
Height (H2)	105 in	2,667 mm
Nose to rear mount length (L1)	125 in	3,175 mm
Length, transport (L2)	154 in	3,910 mm
Wheelbase (L4)	79 in	2,005 mm
Width (W2)	82 in	2,085 mm
Width (W4)	64 in	1,625 mm

POWER PLANT		
Engine	Deutz® TCD3.6L4	
Fuel	Diesel	
Cooling medium	Liquid	
Injection	Direct	
Aspiration	Turbocharged, charge air cooled	
Number of cylinders	4	
Displacement	221 in ³	3.6 L
Bore	3.86 in	98 mm
Stroke	4.72 in	120 mm
Manufacturer's gross power rating (SAE J1995)	107 hp	80 kW
Rated speed	2,300 rpm	
Engine tilt angles, max		
Longitudinal	30°	
Lateral	30°	
Emissions compliance (highly regulated countries)	EPA Tier 4 Final	EU Stage IV

POWER TRAIN		
Ground drive	(Driving) powershift	
Differentials	Planetary front and rear w/rear steering	
Service brake	Disc type, foot operated	
Parking brake	Disc type, SAHR	

OPERATION		
Forward speed		
Crowd	0.6 mph	0.96 km/h
Low	6.2 mph	9.9 km/h
High	9.2 mph	14.9 km/h
Reverse speed		
Crowd	0.6 mph	0.96 km/h
Low	6.2 mph	9.9 km/h
High	9.2 mph	14.9 km/h
Vehicle clearance circle (SAE) wall to wall w/backfill blade		
Front steer only	35 ft	10.7 m
Front and rear steer	21 ft	6.4 m
Ground clearance	14 in	356 mm
Basic unit weight	9,700 lb	4400 kg
Allowable tractor weight, max	22,000 lb	9979 kg
Front counterweight	1,300 lb	590 kg
Side counterweight, each	250 lb	114 kg

	U.S.	METRIC
HYDRAULIC SYSTEM @ 2,300 RPM		
Crowd circuit drive/steer pump capacity	11.5 gpm	43 l/min
Pump relief pressure	3,100 psi	213 bar
Auxiliary pump capacity	5.1 gpm	19.3 l/min
Auxiliary pump relief pressure	3,000 psi	206 bar

FLUID CAPACITIES		
Fuel tank	38 gal	144 L
Engine oil	8.5 qt	8 L
Hydraulic reservoir	25 gal	95 L
Hydraulic system	30 gal	114 L
Cooling system	4.25 gal	16.1 L
DEF tank	2.6 gal	10 L


NOISE LEVEL		
Operator	91 dBA sound pressure per ISO 6394	
Exterior	107 dBA sound power per ISO 6393	

BACKFILL BLADE		
Blade width	80 in	2030 mm
Blade height	17 in	430 mm
Lift height above ground	26 in	660 mm
Blade drop below ground	10 in	254 mm
Swing angle, max (left/right)	30°	
Tilt angle, up/down	12°	

BATTERY (2 USED)		
Group	65	
SAE reserve capacity	165 min	
Auxiliary power outlet	12 volt, 10 amps	

VIBRATION LEVEL		
Average vibration transmitted to the operator's hand during normal operation is 5.98 m/sec ² .		
Average vibration transmitted to the operator's whole body during normal operation does not exceed 0.64 m/sec ² .		

Unless otherwise specified, all figures are for standard equipment only. Specifications are called out according to SAE recommended procedures. Due to selected options, delivered equipment may not necessarily match that described. Specifications are general and subject to change without notice. If exact measurements are required, equipment should be weighed and measured.

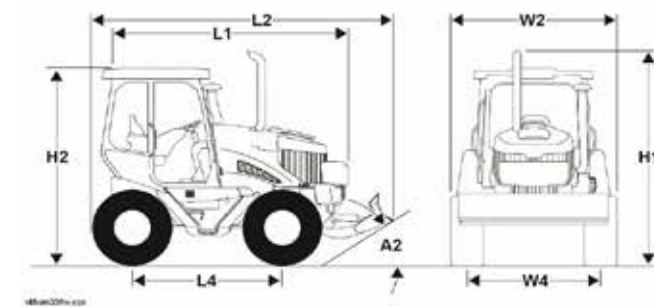

RT105M ATTACHMENT SPECIFICATIONS

BH120 BACKHOE



	U.S.	METRIC
DIMENSIONS		
Transport height	118 in	2997 mm
Ground clearance	29 in	736 mm
Digging depth, max	112 in	2844 mm
Reach from swing pivot	158 in	4013 mm
Bucket width	12-24 in	300-610 mm
Backhoe weight without bucket	3,300 lb	1497 kg
Swing arc	180°	

CT100M CENTERLINE TRENCHER



	U.S.	METRIC
DIMENSIONS		
Angle of departure	23.7°	
Trench depth, max	97 in	2463 mm
Trench width, max	24 in	610 mm
Transport height	124 in	3251 mm
Transport length	115 in	2921 mm
Attachment weight	1,750 lb	794 kg

DT100M DUAL POSITION TRENCHER



	U.S.	METRIC
DIMENSIONS		
Angle of departure	28°	
Trench depth, max	97 in	2464 mm
Trench width, center position max	24 in	610 mm
Trench width, offset position max	12 in	305 mm
Transport height	124 in	3251 mm
Transport length	115 in	2921 mm
Attachment weight	1,750 lb	794 kg

